

ATEM 1 M/E Broadcast Panel



When the software control panel is too limited, the ATEM 1 M/E Broadcast Panel is a professional panel with the highest quality buttons, knobs and controls for the most demanding 24/7 live production environment. The ATEM 1 M/E Broadcast Panel is compact so it fits within a rack width! You get full control of your switcher, including cameras, transitions, keyers, fader, DVE control and more. ATEM 1 M/E Broadcast Panel connects via ethernet and includes a loop thru connection for more than one panel or computer.


Connections

Ethernet

2 x 10/100/1000 BaseT with loop output for additional control panels or computers.

Software Updates

1 x USB for firmware updates

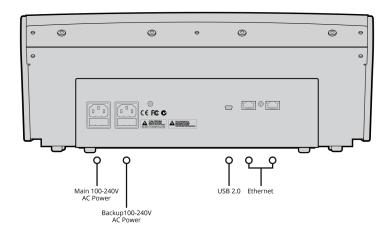

Product Specifics

Direct Cross Points

10

Shifted Cross Points

20

DSK Transition Selectors

Auto, Cut, Tie/Preview.

Preview Transition

Multi Control Buttons

None

Destination Bus

Crosspoint Button Type Transition Rate Displays Source Select Bus Tri-Color LED. **Crosspoint Label** LED Menu Display Fader Bar 4 Character LED. **Next Transition Selectors** Menu Control 3 Axis Joystick BKG, Key 1 - Key 4. 12 x LCD Bitmap Buttons. **On-Air indicator Dedicated Macro Buttons** Numeric Keypad 4 None **Power Status Indicators** 4

Software

Software Applications

ATEM Software Control Panel.

Operating Systems



Mac OS X 10.10 Yosemite, Mac OS X 10.11 El Capitan or later.

Aerospace Certified Embedded OS.



Aerospace Certified Embedded OS.

Power Requirements

Input Voltage

2 x Internal 110 - 240V AC.

Redundant Power

Yes

Power Usage

40W

Physical Specifications





Environmental Specifications

Operating Temperature

0° to 40° C (32° to 104° F)

Storage Temperature

-20° to 60° C (-4° to 140° F)

Relative Humidity

Up to 95%

What's Included

ATEM 1 M/E Broadcast Panel

Warranty

12 Month Limited Manufacturer's Warranty

Repair Policy

Warranty details can be found in the ATEM Switchers Operation Manual in the support page at www.blackmagicdesign.com